

General Description

Series DUR*L06 proportional flow control valves are used to generate pressure-compensated flow from A to B. The valves are equipped with a built-in check valve for the return flow.

A rectifier plate can be used for meter-in and meter-out control of an actuator.

Function

When solenoid current is applied, the metering spool opens against the reset spring and the flow is regulated by the pressure compensating spool to port B.

With the aid of the pressure compensating spool, the pressure drop is held constant on the metering window. Thus pressure load changes are compensated, and the oil flow remains constant.

The valve parameters can be saved, changed and duplicated in combination with the digital electronic module PCD00A-400.

Features

- Low hysteresis
- High reproducibility
- Load-independent oil flow
- Bypass check valve
- Mounting pattern to ISO 6263
- 5 flow rates

Ordering Information

DUR

Proportional Pressure Reducing Valve

□

Nominal Flow

L

Linear Solenoid 24V / 0.68 A

06

Size NG6

P

Progressive Performance Curve

K

□

Seal



□

Design Series

NOTE:
Not required when ordering.

Code	Description
1.6	1.6 LPM (0.4 GPM)
3.2	3.2 LPM (0.8 GPM)
6.3	6.3 LPM (1.7 GPM)
12	12.0 LPM (3.2 GPM)
18	18.0 LPM (4.8 GPM)

Code	Description
A	Nitrile
1	Fluorocarbon

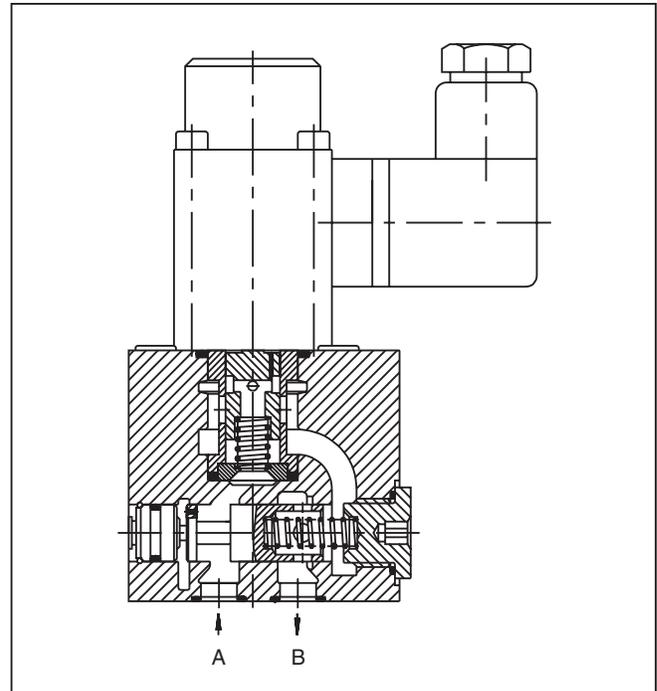

Weight: 1.6 kg (3.5 lbs.)


Specifications

General		
Design		Electrically adjustable orifice valve with load sensing
Mounting Interface		Subplate NG6, Interface DIN 24340, ISO, CETOP
Mounting Position		Unrestricted, preferably horizontal
Ambient Temperature	[°C]	-20...+50; (-43°F...+122°F)
MTTF _D Value	[years]	150
Supply Voltage	[V]	24
Solenoid Nominal Current	[mA]	680
Duty Cycle	[%]	100 ED; CAUTION: Coil temperature up to 150°C (302°F) possible
Solenoid Connection		Connector as per EN 175301-803
Protection Class		IP 65 in accordance with EH 60529 (plugged and mounted)
Amplifier Module		PCD00A-400
Operating Pressure		210 Bar (3045 PSI)
Fluid		Hydraulic oil according to DIN 51524...51535, other on request
Fluid Temperature	[°C]	+20 ... +70 (+68°F...+158°F)
Viscosity Range	[cSt]/[mm ² /s]	12...230 (56...1066 SSU)
Filtration		ISO 4406 (1999); 18/16/13 (acc. NAS 1638: 7)
Minimum Pressure Difference		DUR 1.6/3.2: 3 Bar (43.5 PSI); DUR 6.3/12: 5 Bar (72.5 PSI); DUR 18: 8 Bar (116 PSI)
Hysteresis at Q _{nom}	[%]	6
Hysteresis at Q ≤ 20 % • Q _{nom}	[%]	6
Repeatability at ΔU _{set} = 5 V	[%]	2


B

Performance Curves


DUR 1.6 L 06 PK*

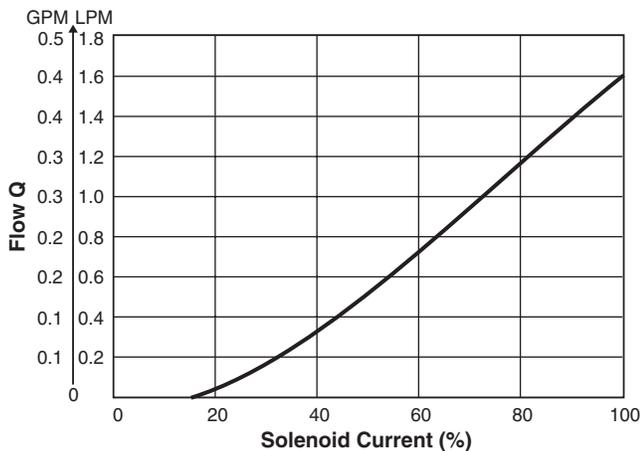

DUR 12 L 06 PK* / DUR 18 L 06 PK*


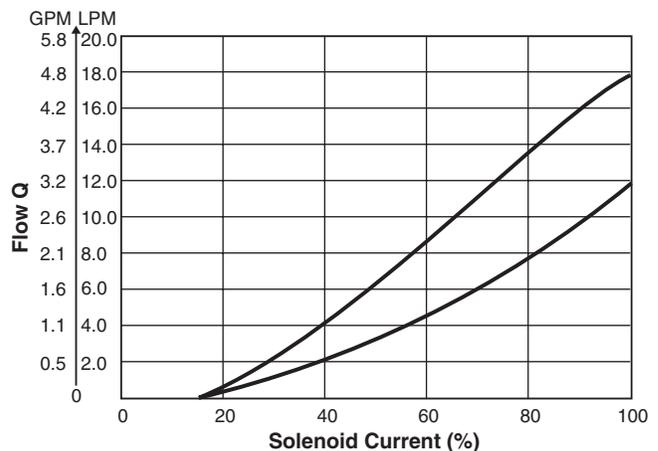


DUR 3.2 L 06 PK* / DUR 6.3 L 06 PK*

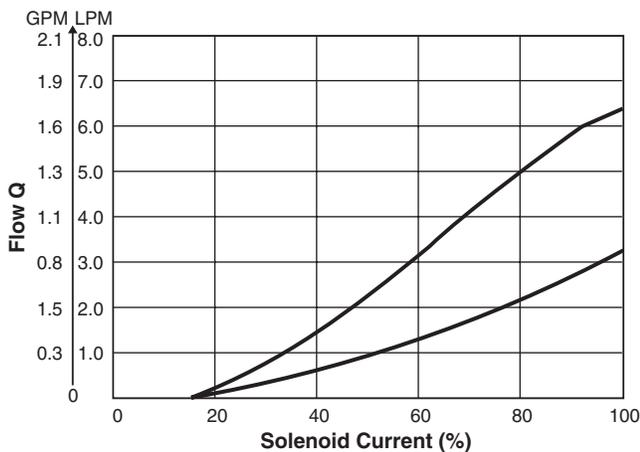

All performance curves measured with HLP46 at 50 °C (122 °F).

B

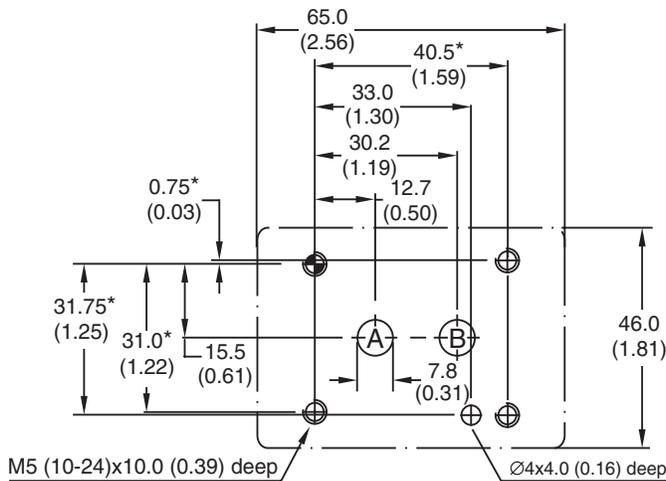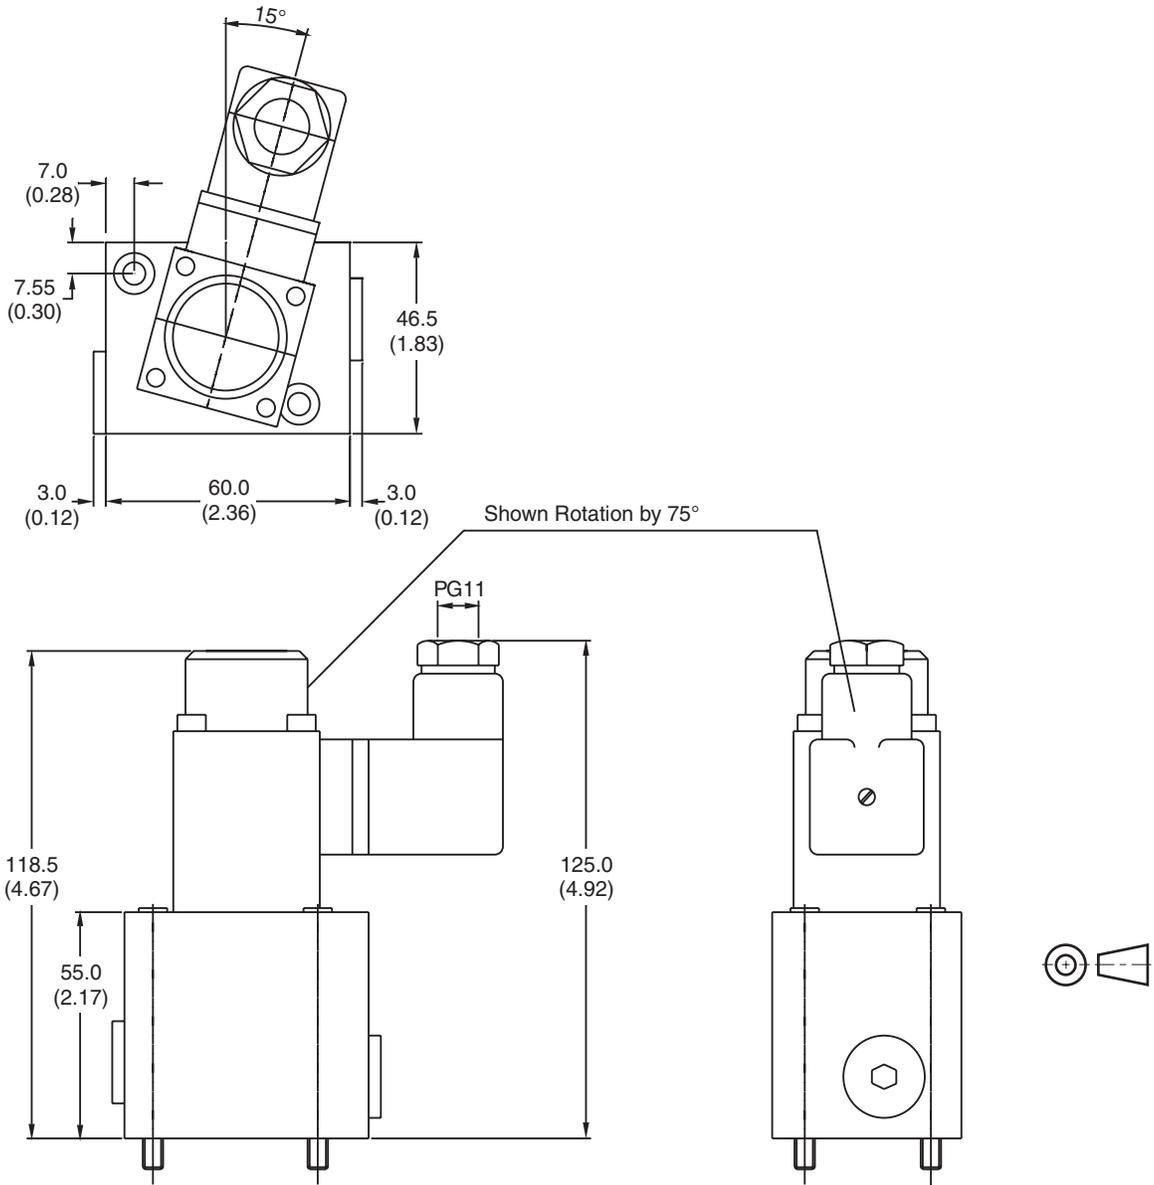

* ... ± 0.1mm
Others ... ± 0.2mm

Seal Kits


Nitrile	Fluorocarbon
SK-DURL	SK-DURLV

Sandwich Rectifier Plate


If a 2-way flow control valve is used in combination with a rectifier plate, the valve can be used for meter-in and meter-out flow control of an actuator.

Design

The intermediate rectifier plate is designed with four identical, symmetrically arranged check valves. Thus the differential pressure is the same in both flow directions.






Performance Curve $\Delta p/Q$

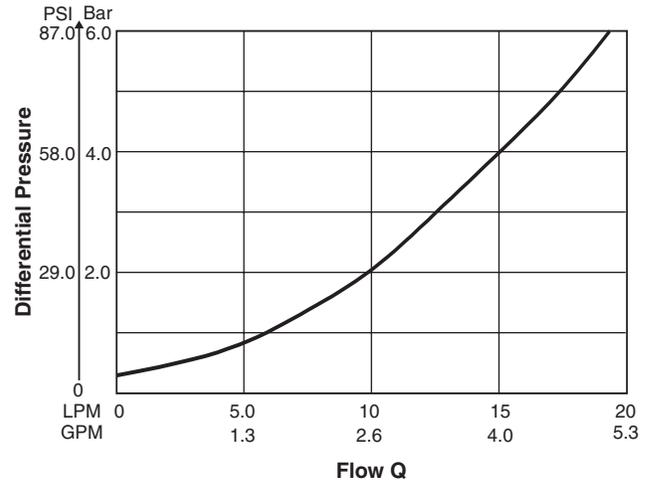

All performance curves measured with HLP46 at 50 °C (122 °F).

Dimensions

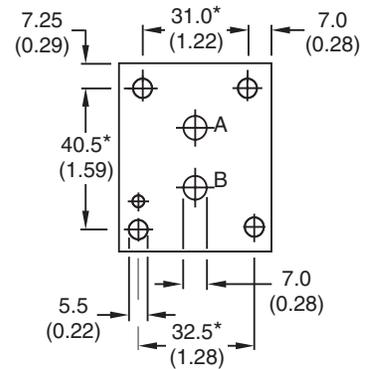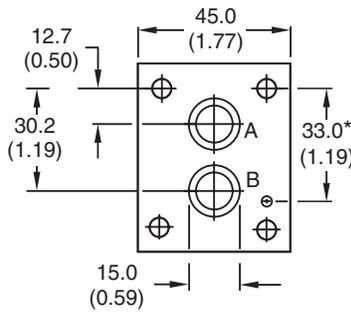

Dimension Tolerances

* ... $\pm 0.1\text{mm}$

Others ... $\pm 0.2\text{mm}$

Holes and Silhouette of Valve Body ... Untoleranced Dimension



Rectifier Plate

Ordering Code: HROA06C

O-ring for sealing the connecting surface (not included)

Connections	Dimensions	Required Units
A, B	12 x 1.5	2

Subplates

Ordering Code	Description
SPD22B910	P, A, B and T = G1/4
SPD23B910	P, A, B and T = G1/8