

Compact 3/2 normally closed metal bodied valves with push-in air connections. Designed for the process duty cycle with high durability. Ideal for the process or packaging industry.

- High durability
- Very good repeat accuracy
- Design for process duty cycle
- Push-in connection
- Versatile and easily maintained
- Miniature size


 **For ATEX specific products contact Sales Office**





Operating information

Working pressure; PXC-M	3 to 8 bar
Working temperature	-15 °C to +60 °C
PXC-M111 PXC-M121 PXC-M521 PXC-M601	
Flow (Qmax):	60 l/min 85 l/min 250 l/min 250 l/min
For more information see www.parker.com/euro_pneumatic	


Bore Ø1,5 mm, flow 60 NI/min

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Steel plunger	Spring	11	PXC-M111

Bore Ø1,5 mm, flow 85 NI/min

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Plastic roller	Spring	4,5	PXC-M121
	Steel roller	Spring	4,5	PXC-M131




Bore Ø2,5 mm, flow 250 NI/min

Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Plastic roller	Spring	7	PXC-M521

3/2 compact limit switches -

With Ø4mm Push-in connections with pipeable exhaust port

Bore Ø2,5mm, flow 250 NI/min - With plunger head


Symbol	Actuator	Return at 6 bar, N	Operating forces	Order code
	Steel plunger	Spring	24	PXC-M601A110
	Steel roller plunger	Spring	24	PXC-M601A102
	90° Steel roller plunger	Spring	24	PXC-M601A103

Dimensions, Limit switches, Series PXC


All dimensions in mm unless otherwise stated

3/2 miniature limit switches


PXC-M111 PXC-Z12 PXC-Z11



PXC-M121 - PXC-M131

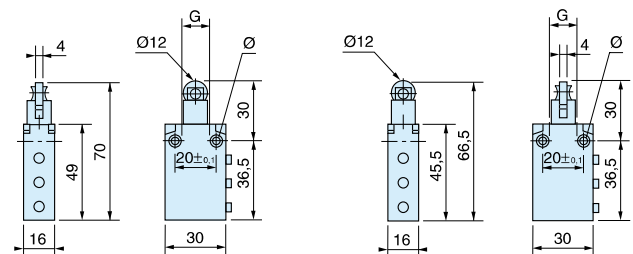


PXC-M521



3/2 compact limit switches

PXC-M601A102 PXC-M601A103



PXC-M601A110

