

P5RS - Rotary Actuators

The P5RS rotary table units provide precise control even under heavy loads, with specially designed load fixing and centring capabilities. End stroke cushioning using supplied adjusting bolts or optional shock absorbers offers dependable linear cushioning enabling objects to be carried and positioned safely and securely.



- Bores Ø16, 20, 25 and 32mm
- Twin rack and pinion
- Adjustable between 0° and 190°
- Magnetic piston standard
- Stroke adjusters standard
- Optional shock absorbers bore Ø20 and 25mm
- Easy mounting of work piece

Operating Information

Pressure range:	1 to 9 bar
Temperature range:	-5° to 60° C
Filtration requirements:	
Air filtration	40 micron or better
Air lubrication	Not necessary*
Air humidity	Low moisture content (dry)

* Addition of lubrication will greatly increase service life

For more information see www.parker.com/euro_pneumatic

Ordering Information: P5RS

Bore mm	Description	Ports (BSPP)	Rotation	Torque (N-m at 5 bar)	Weight (kg)	Order code
16	Rotary table, stroke adjusters	1/8	190 degrees	1.21	0.7	P5RS-016DSG190B
20	Rotary table, stroke adjusters	1/8	190 degrees	2.51	1.16	P5RS-020DSG190B
25	Rotary table, stroke adjusters	1/8	190 degrees	4.91	1.57	P5RS-025DSG190B
32	Rotary table, stroke adjusters	1/8	190 degrees	9.86	3.07	P5RS-032DSG190B

Note: Above units are supplied with rubber buffer stroke adjusters.

Optional Shock Absorbers

Bore mm	Rotary Actuator	Order code
16	P5RS-016DSG190B	N/A
20	P5RS-020DSG190B	N/A
25	P5RS-025DSG190B	MC150M
32	P5RS-032DSG190B	MC225M

Sensors - Series P8S-F

Magnetic Sensor



Reed, NO

M8 - Snap in



0.15 m PUR cable with M8 connector

P8S-FRSUS


Flying lead



2 m PUR cable


P8S-FRFXS

Load capacity P5RS Rotary Table

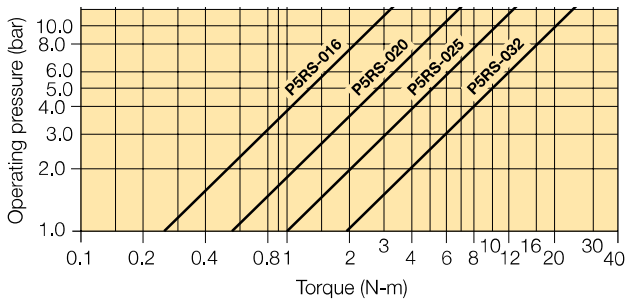


Allowable load

Set the load and moment to be applied to the table within the allowable values shown in the table below. (Values outside of limitations will cause excessive play, deteriorate accuracy, and shorten service life).



Bore	Allowable radial load (N)	Allowable thrust load (N)		Allowable moment (Nm)
		(a)	(b)	
16	78	74	78	2,4
20	147	137	137	4,0
25	196	197	363	5,3
32	314	296	451	9,7

Dimensions P5RS Rotary Table

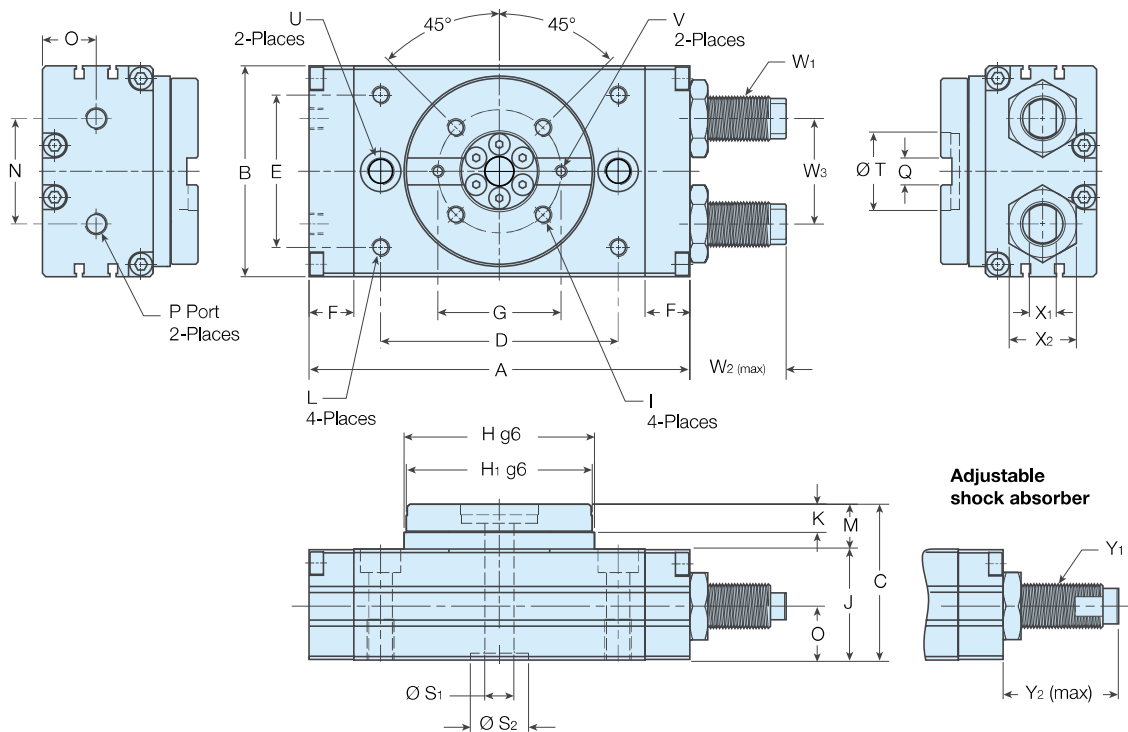

Bore mm	A	B	C	D	E	F	G	H	H ₁	I	J	K	L	M	N	O	P	Q
16	108	58	47	62	38	15	38	50	48	M5 x 7 Dp, P,C,D38	33	8	M5 x 8 Dp	14	26	15,5	PT 1/8	8 ^{+0,03} x 3,3 Dp
20	128	68	55	78	47	15	46	62,5	60	M6 x 7 Dp, P,C,D46	38	10	M6 x 8 Dp	17	27	18,5	PT 1/8	10 ^{+0,03} x 3,5 Dp
25	135,5	77	58,5	84	55	15,5	48	67	65	M6 x 9 Dp, P,C,D48	41,5	10	M6 x 8 Dp	17	37	20	PT 1/8	12 ^{+0,03} x 4 Dp
32	170	94	69,5	106	68	20	55	85	83	M8 x 10 Dp, P,C,D55	49,5	12,5	M8 x 8,5 Dp	20	47	24	PT 1/8	12 ^{+0,03} x 5 Dp

Bore mm	S ₁	S ₂	T	U	V	W ₁	W ₂	W ₃	X ₁	X ₂	Y ₁	Y ₂
16	6	17 (H7) x 2,5 Dp	24 (H7) x 3 Dp	2-Ø 6,8 thru, Ø11 x 6,5 Dp, M8 x 12 Dp (Sink)	M3 x 4 Dp	M10 x 1,0	27	26	7	17	N/A	N/A
20	10	22 (H7) x 2,5 Dp	32 (H7) x 3 Dp	2-Ø 8,6 thru, Ø14 x 8,5 Dp, M10 x 15 Dp (Sink)	M4 x 6 Dp	M12 x 1,0	23	32	8	19	N/A	N/A
25	13	22 (H7) x 3 Dp	32 (H7) x 3,7 Dp	2-Ø 8,6 thru, Ø14 x 8,5 Dp, M10 x 15 Dp (Sink)	M4 x 5 Dp	M14 x 1,5	36	37	8	22	MC150M	52
32	13	26 (H7) x 3 Dp	35 (H7) x 4,7 Dp	2-Ø 10,5 thru, Ø18 x 10,5 Dp, M12 x 18 Dp (Sink)	M5 x 5 Dp	M20 x 1,5	43	47	12	30	MC225M	62

Dimensions in (mm)

