

Rosemount™ Smart Pressure Gauge



The Rosemount Smart Pressure Gauge from Emerson™ utilizes industry-proven Rosemount pressure sensor technology to deliver accurate, reliable pressure information. It features up to 150x overpressure protection and two layers of process isolation providing a safer field environment. Rosemount sensor technology eliminates many gauge challenges by replacing mechanical parts that inhibit traditional gauges from reporting or displaying the correct pressure. The Rosemount Smart Pressure Gauge features a large 4.5-in. (114 mm) face for easy field visibility. It has up to a 10-year installed life, reducing costs and time involved with maintenance.

Product benefits

Reduce maintenance challenges

- Get up to 10-years of reliable readings through industry-proven, pressure sensor technology
- Reduce common mechanical gauge failures caused by vibration, overpressure, and other environmental factors
- Have confidence in pressure gauge health with local indicator light

Improve personnel safety

- Gain peace of mind with overpressure ratings from up to 150x and two layers of process isolation

Contents

Ordering Information	3	Product certifications	12
Specifications	10	Dimensional drawings	14

Ordering Information

Table 1. Rosemount Smart Pressure Gauge Ordering Information

The starred offerings (★) represent the most common options and should be selected for best delivery. The non-starred offerings are subject to additional delivery lead time.

Model	Device type		
SPG	Smart Pressure Gauge		★
Dial size			
45	4.5-in. (114.3 mm)		★
Gauge output			
L	Local HART® terminals for local configuration only		★
Product certifications			
I1	ATEX Intrinsic Safety		★
I5	US Intrinsically Safe		★
I6	Canada Intrinsically Safe		★
I7	IECEx Intrinsic Safety		★
NA	No approval		★
Measurement type			
G	Gage		★
A	Absolute		★
C	Compound		★
V	Vacuum		★
Process connection style⁽¹⁾			
	Connection style	Isolating diaphragm material	★
01	Alternate process connection	316 SST (stainless steel)	★
02	Alternate process connection	Alloy C-276	★
11	1/2-14 NPT male	316L SST	★
12	1/2-14 NPT male	Alloy C-276	★
21	G1/2 male (EN 837)	316L SST	★
22	G1/2 male (EN 837)	Alloy C-276	★
Primary engineering unit			
A	psi		★
B	kPa		★
D	bar		★
E	mBar		★
F	MPa		★

Table 1. Rosemount Smart Pressure Gauge Ordering Information

The starred offerings (★) represent the most common options and should be selected for best delivery. The non-starred offerings are subject to additional delivery lead time.

G	inH ₂ O	★
H	kg/cm ²	★
I	ftH ₂ O	
J	mmH ₂ O	
K	inHg	★
L	cmH ₂ O	★
M	cmHg	★
N	mmHg	★
P ⁽²⁾⁽³⁾	Percent of range (% of range)	★
Scale ranges		
Reference tables in Pressure scale ranges section for scale ranges by engineering unit.		★

Options (include with selected model number)

Secondary engineering unit (dual scale)		
DA ⁽⁴⁾	psi	★
DB ⁽⁴⁾	kPa	★
DD ⁽⁴⁾	bar	★
DH ⁽⁴⁾	kg/cm ²	★
DC ⁽²⁾⁽³⁾⁽⁵⁾⁽⁶⁾	CU	
Manifolds assemblies⁽⁷⁾⁽⁸⁾⁽⁹⁾		
S5	Assemble to Rosemount 306 Integral Manifold	
Diaphragm seal assembly⁽⁸⁾⁽⁹⁾⁽¹⁰⁾		
S1	Assemble to one Rosemount 1199 Diaphragm Seal	
Extended product warranty		
WR3	3-year limited warranty	★
WR5	5-year limited warranty	★
Mounting bracket		
B4	Bracket for 2-in. pipe or panel mounting, all SST	★
Custom configuration		
C1	Custom configuration	★

Table 1. Rosemount Smart Pressure Gauge Ordering Information

The starred offerings (★) represent the most common options and should be selected for best delivery. The non-starred offerings are subject to additional delivery lead time.

Calibration certification		
Q4	Calibration certificate	★
Material traceability certification		
Q8	Material traceability certification per EN 10204 3.1	★
NACE® certificate		
Q15	Certificate of compliance to NACE MR0175/ISO 15156 for wetted materials	★
Q25	Certificate of compliance to NACE MR0103 for wetted materials	★
Pressure testing		
P1	Hydrostatic testing with certificate	★
Surface finish⁽¹¹⁾		
Q16	Surface finish certificate for Sanitary Remote Seals	★
Normal range indication		
LK	Green, yellow, and red sticker kit	★
Alternate process connection⁽¹²⁾		
P01	Level flange (SST), 1-in. ANSI Class 150	
P02	Level flange (SST), 1-in. ANSI Class 300	
P11	Level flange (SST), 2-in. ANSI Class 150	
P12	Level flange (SST), 2-in. ANSI Class 300	
P21	Level flange (SST), 3-in. ANSI Class 150	
P22	Level flange (SST), 3-in. ANSI Class 300	
P31	Level flange (SST), DIN-DN 50 PN 40	
P41	Level flange (SST), DIN-DN 80 PN 40	
W01	Level flange (SST), 1-in. ANSI Class 150, All welded construction	
W02	Level flange (SST), 1-in. ANSI Class 300, All welded construction	
W11	Level flange (SST), 2-in. ANSI Class 150, All welded construction	
W12	Level flange (SST), 2-in. ANSI Class 300, All welded construction	
W21	Level flange (SST), 3-in. ANSI Class 150, All welded construction	
W22	Level flange (SST), 3-in. ANSI Class 300, All welded construction	
W31	Level flange (SST), DIN-DN 50 PN 40, All welded construction	
W41	Level flange (SST), DIN-DN 80 PN 40, All welded construction	

- Materials of Construction comply with recommendations per NACE MR0175/ISO 15156 for sour oil field production environments. Environmental limits apply to certain materials. Consult latest standard for details. Selected materials also conform to NACE MR0103 for sour refining environments.
- Not available with measurement type compound.

3. Not available with measurement type vacuum.
4. Not available with primary engineering unit "P" (percent of range).
5. Requires primary engineering unit of "A" (psi) or "D" (bar).
6. Requires custom configuration model code "C1".
7. Requires process connection style "11" or "12".
8. Integrated manifold and diaphragm seal assemblies cannot be combined.
9. "Assemble-to" items are specified separately and require a completed model number.
10. Requires process connection 11.
11. Requires diaphragm seal assembly "S1"
12. Requires process connection style "01" or "02"

Figure 1. Model Number Ordering Example

Model	Dial size	Gauge output	Product certification	Measurement type	Process connection style	Primary engineering unit	Scale range	Options
SPG	45	L	11	A:	11	A	6-digit numeric value	DA, S1...
Factory defined			End-user defined					

Pressure scale ranges

Additional scale ranges available. Contact Emerson for additional information.

Psi		
Code	Vacuum -psi to 0	
000000	-15/0	
	Gage/absolute 0 to psi	Compound ⁽¹⁾ -30 inHg to 0 to psi
000005	5	5
000010	10	10
000015	15	15
000020	20	20
000030	30	30
000050	50	50
000060	60	60
000075	75	75
000100	100	100
000150	150	150
000160	160	160
000200	200	200
000300	300	300
000400	400	N/A
000500	500	N/A
000600	600	N/A
000800	800	N/A
001000	1000	N/A
001500	1500	N/A
002000	2000	N/A
003000	3000	N/A
004000	4000	N/A

1. Vacuum scale will be in inHg and positive pressure in psi. Only applies to psi.

Bar-kg/cm ²		
Code	Vacuum -bar to 0 or -kg/cm ² to 0	
000000	-1/0	
	Gage/absolute 0 to bar or 0 to kg/cm ²	Compound -1 bar to 0 to bar or -1 kg/cm ² to 0 to kg/cm ²
000000D40	0.4	0.4
000000D60	0.6	0.6
000001	1	1
000001D50	1.5	1.5
000001D60	1.6	1.6
000002	2	2
000002D50	2.5	2.5
000003	3	3
000004	4	4
000005	5	5
000006	6	6
000009	9	9
000010	10	10
000015	15	15
000016	16	16
000020	20	20
000024	24	N/A
000025	25	N/A
000040	40	N/A
000050	50	N/A
000060	60	N/A
000070	70	N/A
000100	100	N/A
000160	160	N/A
000250	250	N/A

kPa		
Code	Vacuum -kPa to 0	
000000	-100/0	
	Gage/absolute 0 to kPa	Compound -100 to 0 to kPa
000040	40	40
000060	60	60
000100	100	100
000150	150	150
000160	160	160
000200	200	200
000250	250	250
000300	300	300
000400	400	400
000500	500	500
000600	600	600
000900	900	900
001000	1000	1000
001500	1500	1500
001600	1600	1600
002000	2000	2000
002400	2400	N/A
002500	2500	N/A
004000	4000	N/A
005000	5000	N/A
006000	6000	N/A
010000	10000	N/A
025000	25000	N/A

mbar		
Code	Vacuum -mbar to 0	
000000	-1000/0	
	Gage/absolute 0 to mbar	Compound -1000 to 0 to mbar
000400	400	400
000600	600	600
001000	1000	1000
001500	1500	1500
002000	2000	2000
003000	3000	3000
004000	4000	4000
005000	5000	5000
006000	6000	6000
009000	9000	9000
MPa		
Code	Vacuum -MPa to 0	
000000	-0.1/0	
	Gage/absolute 0 to MPa	Compound -0.1 to 0 to MPa
000000D20	0.2	0.2
000000D50	0.5	0.5
000001	1	1
000001D50	1.5	1.5
000002	2	2
000002D50	2.5	N/A
inH ₂ O		
Code	Vacuum -inH ₂ O to 0	
000000	-400/0	
	Gage/absolute 0 to inH ₂ O	Compound -400 to 0 to inH ₂ O
000200	200	200
000300	300	300
000800	800	800

ftH ₂ O		
Code	Vacuum -ftH ₂ O to 0	
000000	-30/0	
	Gage/absolute 0 to ftH ₂ O	Compound -30 to 0 to ftH ₂ O
000035	35	35
000060	60	60
000070	70	70
000100	100	100
000140	140	140
000240	240	240
000400	400	400
000500	500	500
000700	700	700
000900	900	N/A
mmH ₂ O		
Code	Vacuum -mmH ₂ O to 0	
000000	-10000/0	
	Gage/absolute 0 to mmH ₂ O	Compound -10000 to 0 to mmH ₂ O
007500	7500	7500
040000	40000	40000
200000	200000	200000
inHg		
Code	Vacuum -inHg to 0	
000000	-30/0	
	Gage/absolute 0 to inHg	Compound -30 to 0 to inHg
000012	12	12
000015	15	15
000016	16	16
000020	20	20
000030	30	30
000060	60	60
000300	300	300

cmH ₂ O		
Code	Vacuum -cmH ₂ O to 0	
000000	-1000/0	
	Gage/absolute 0 to cmH ₂ O	Compound -1000 to 0 to cmH ₂ O
000500	500	500
000900	900	900
cmHg		
Code	Vacuum -cmHg to 0	
000000	-75/0	
	Gage/absolute 0 to cmHg	Compound -75 to 0 to cmHg
000150	150	150
000750	750	750
004000	4000	N/A
020000	20000	N/A
mmHg		
Code	Vacuum -mmHg to 0	
000000	-750/0	
	Gage/absolute 0 to mmHg	Compound -750 to 0 to mmHg
001500	1500	1500
007500	7500	7500
040000	40000	N/A
200000	200000	N/A
Percent of range ⁽¹⁾		
Code	Gage/absolute	
000030	30	
000150	150	
000800	800	
004000	4000	

1. Scale will read 0-100 percent. Code selected is representative of the desired working pressure range in psi.

Specifications

Physical specifications

Material selection

Emerson provides a variety of Rosemount products with various product options and configurations including materials of construction that can be expected to perform well in a wide range of applications. The Rosemount product information presented is intended as a guide for the purchaser to make an appropriate selection for the application. It is the purchaser's sole responsibility to make a careful analysis of all process parameters (such as all chemical components, temperature, pressure, flow rate, abrasives, contaminants, etc.), when specifying product materials, options, and components for the particular application. Emerson is not in a position to evaluate or guarantee the compatibility of the process fluid or other process parameters with the product options, configuration, or materials of construction selected.

Dial size

4.5-in. (114.3 mm)

Scale ranges

From vacuum up to 4,000 psi (275 bar)

Single scale considerations

The number of major graduations is a direct result of the specified combination of primary engineering unit and scale range.

Dual scale considerations

The number of major graduations on the inner scale is the direct result of the combination of primary engineering unit and secondary engineering Unit.

Process connections

1/2–14 NPT male, G1/2 male (EN 837) and alternate process connections.

Field Communicator connections

Communication terminals are accessible by removing cover.

Material of construction

Housing

Engineered Polymer, NEMA® 4X and IP66/67

Cover O-ring

Silicone rubber

Process-wetted parts

316L SST, Alloy C-276

Shipping weight

1.8 lb (0.82 kg)

Options

Mounting bracket (Code B4)

1.0 lb (0.5 kg)

Normal range indication (Code LK)

0.02 lb (11 g)

Rosemount 1199 seal systems

Reference the Rosemount DP Level [Product Data Sheet](#) for shipping weights.

Rosemount 306 integrated manifolds

Reference the Rosemount Manifolds [Product Data Sheet](#) for shipping weights.

Operating specifications

Conformance to specification ($\pm 3\sigma$ [Sigma])

Technology leadership, advanced manufacturing techniques, and statistical process control ensure specification conformance to at least $\pm 3\sigma$.

Accuracy

ASME B40.1 – Grade 2A (0.5% of span)

Temperature limits

Ambient

–40 to 185 °F (–40 to 85 °C)

Storage

–40 to 185 °F (–40 to 85 °C)

Process

–40 to 250 °F (–40 to 121 °C)⁽¹⁾⁽²⁾

Options

Normal range indication (code LK)

Ambient: –40 to 185 °F (–40 to 85 °C)

Storage: 70 °F (21 °C)

Application: Minimum of 50 °F (10 °C)

1. Process temperatures above 185 °F (85 °C) require de-rating the ambient limits by a 1.5:1 ratio.
2. 220 °F (104 °C) limit in vacuum service; 130 °F (54 °C) for pressures below 0.5 psia.

Electrical connections/battery

Replaceable, non-rechargeable, 3.6 V primary cell, lithium-thionyl chloride battery
 10-year battery life at reference conditions⁽¹⁾

Overpressure limit

Scale range	Maximum working pressure	Maximum overpressure limit
5 to 30 psi (0.35 to 2 bar)	30 psi (2 bar)	750 psi (51.7 bar)
31 to 150 psi (2.1 to 10.3 bar)	150 psi (10.3 bar)	1,500 psi (103.4 bar)
151 to 800 psi (10.4 to 55.1 bar)	800 psi (55.1 bar)	1,600 psi (110.3 bar)
801 to 4,000 psi (55.2 to 275 bar)	4,000 psi (275 bar)	6,000 psi (413.7 bar)

Burst pressure limit

11,000 psi (758 bar)

Minimum span limits for percent of range engineering unit

The maximum rangedown is 10:1. The device maintains reference accuracy specification up to 6:1 rangedown. After 6:1 rangedown the reference accuracy decreases to 1% of span.

Scale range	Span (6:1 rangedown)	Minimum span (10:1 rangedown)
5 – 30 psi (0.35 – 2 bar)	5 psi (0.34 bar)	3 psi (0.21 bar)
31 – 150 psi (2.1 – 10.3 bar)	25 psi (1.72 bar)	15 psi (1.03 bar)
151 – 800 psi (10.4 – 55.1 bar)	134 psi (9.24 bar)	80 psi (5.51 bar)
801 – 4,000 psi (55.2 – 275 bar)	667 psi (45.99 bar)	400 psi (27.5 bar)

Ambient temperature effect per 18 °F (10 °C)

Scale range	Ambient temperature effect
Smart pressure gauge	

Ambient temperature effect per 18 °F (10 °C)

Scale range	Ambient temperature effect
Up to 4,000 psi (275 bar)	±0.3 of span
Smart pressure gauge with remote seal	
Up to 4,000 psi (275 bar)	See Instrument Toolkit software.

Digital zero trim

An offset adjustment to compensate for mounting position effects, up to 5% of span

Humidity limits

0 to 95% relative humidity

Electromagnetic compatibility (EMC)

Meets all industrial environment requirements of EN61326. Maximum deviation < 1% span during EMC disturbance.

Status indication

Device status is indicated by local LED. Reference the Rosemount Smart Pressure Gauge [Quick Start Guide](#) for further detail.

Vibration effect

No significant effect when tested per IEC60770-1 or ASME B40.1 requirements

IEC60770-1 high vibration level - field or pipeline: 10–60 Hz 0.21 mm displacement peak amplitude/60–2000 Hz 3 g

1. Reference conditions are 70 °F (21 °C), Stable operating pressure with periodic changes.

Product certifications

Rev: 2.0

European Union Directive Information

A copy of the EU Declaration of Conformity can be found at the end of the Quick Start Guide. The most recent revision of the EU Declaration of Conformity can be found at Emerson.com/Rosemount.

Ordinary location certification from CSA

The product has been examined and tested to determine that the design meets the basic electrical, mechanical, and fire protection requirements by CSA, a nationally recognized test laboratory (NRTL) as accredited by the Federal Occupational Safety and Health Administration (OSHA).

Installing in North America

The US National Electrical Code® (NEC) and the Canadian Electrical Code (CEC) permit the use of Division marked equipment in Zones and Zone marked equipment in Divisions. The markings must be suitable for the area classification, gas, and temperature class. This information is clearly defined in the respective codes.

USA

- I5** U.S.A. Intrinsically Safe (IS)
 Certificate: [CSA] 70047656
 Standards: FM 3600 – 2011, FM 3610 – 2010, UL Standard 50 – Eleventh Edition, UL 61010-1 – 3rd Edition, ANSI/ISA-60079-0 (12.00.01) – 2013, ANSI/ISA-60079-11 (12.02.01) – 2013, ANSI/IEC 60529 – 2004
 Markings: IS CL I, DIV 1, GP A, B, C, D T4;
 Class 1, Zone 0, AEx ia IIC T4 Ga;
 T4 (–40 °C ≤ Ta ≤ +70 °C)
 when installed per Rosemount drawing 00G45-1020;
 Type 4X; IP66/67;

Special Conditions for Safe Use:

1. Do not replace battery when explosive atmosphere is present.
2. Use only 00G45-9000-0001 batteries.
3. The surface resistivity of the housing is greater than 1GΩ. To avoid electrostatic charge build-up, it must not be rubbed or cleaned with solvents or a dry cloth.
4. Substitution of components may impair intrinsic safety.


Canada

- I6** Canada Intrinsically Safe (IS)
 Certificate: [CSA] 70047656
 Standards: CAN/CSA C22.2 No. 0-10, CAN/CSA C22.2 No. 94-M1991 (R2011), CAN/CSA-60079-0-11, CAN/CSA-60079-11-14, CSA Std C22.2 No. 60529-05, CAN/CSA-C22.2 No. 61010-1-12
 Markings: Intrinsically Safe for Class I, Division 1, Groups A, B, C, D T4;
 Ex ia IIC T4 Ga
 T4 (–40 °C ≤ Ta ≤ +70 °C)
 when installed per Rosemount drawing 00G45-1020;
 Type 4X; IP66/67;

Special Conditions for Safe Use (X):

1. Do not replace battery when explosive atmosphere is present.
 Ne pas remplacer les accumulateurs si une atmosphère explosive peut être présente.
2. Use only 00G45-9000-0001 batteries.
 Utiliser uniquement des accumulateurs 00G45-9000-0001.
3. The surface resistivity of the housing is greater than 1GΩ. To avoid electrostatic charge build-up, it must not be rubbed or cleaned with solvents or a dry cloth.
 La résistivité de surface du boîtier est supérieure à un gigaohm. Pour éviter l'accumulation de charge électrostatique, ne pas frotter ou nettoyer avec des produits solvants ou un chiffon sec.
4. Substitution of components may impair intrinsic safety.
 La substitution de composants peut compromettre la sécurité intrinsèque.

Europe

- I1** ATEX Intrinsic Safety
 Certificate: Baseefa16ATEX0005X
 Standards: EN 60079-0: 2012 + A11: 2013, EN 60079-11: 2012
 Markings:  II 1 G Ex ia IIC T4 Ga, T4 (–40 °C ≤ Ta ≤ +70 °C)
 IP66/67

Special Conditions for Safe Use (X):

1. The plastic enclosure may constitute a potential electrostatic ignition risk and must not be rubbed or cleaned with a dry cloth.
2. The measured capacitance between the equipment enclosure and metallic inline sensor module is 4.7pF. This must be considered only when the SPG is integrated into a system where the process connection is not grounded.
3. Do not change the battery when an explosive atmosphere is present.
4. Only replace battery with Rosemount Part No. 00G45-9000-0001.

International


- 17** IECEx Intrinsic Safety
Certificate: IECEx BAS 16.0012X
Standards: IEC 60079-0: 2011, IEC 60079-11: 2011
Markings: Ex ia IIC T4 Ga, T4 (-40 °C ≤ T_a ≤ +70 °C)
IP66/67

Special Conditions for Safe Use (X):

1. The plastic may constitute a potential electrostatic ignition risk and must not be rubbed or cleaned with a dry cloth.
2. The measured capacitance between the equipment enclosure and metallic inline sensor module is 4.7pF. This must be considered only when the SPG is integrated into a system where the process connection is not grounded.
3. Do not change the battery when an explosive atmosphere is present.
4. Only replace battery with Rosemount Part No. 00G45-9000-0001.

Dimensional drawings


Figure 2. Rosemount Smart Pressure Gauge

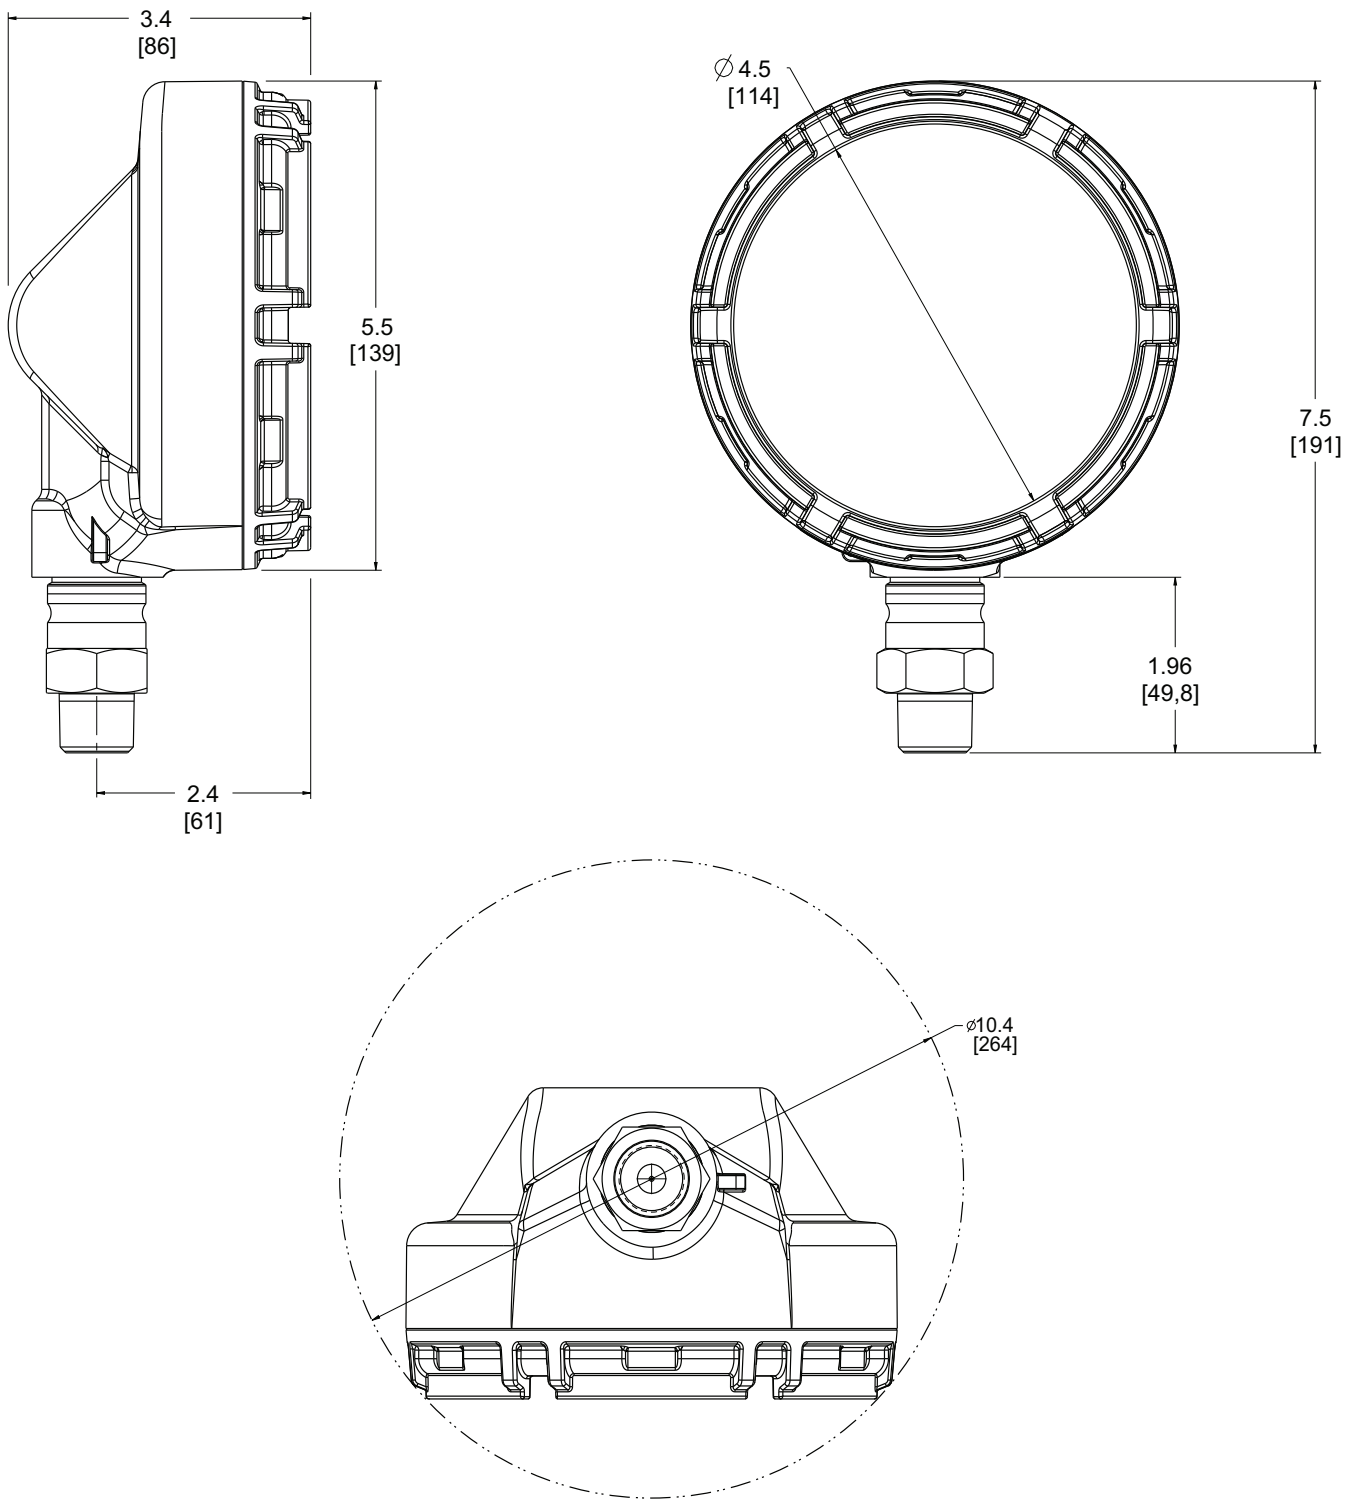

Dimensions are in inches (millimeters).




Global Headquarters

Emerson Automation Solutions

6021 Innovation Blvd.
Shakopee, MN 55379, USA
 +1 800 999 9307 or +1 952 906 8888
 +1 952 949 7001
 RFQ.RMD-RCC@Emerson.com




North America Regional Office

Emerson Automation Solutions

8200 Market Blvd.
Chanhassen, MN 55317, USA
 +1 800 999 9307 or +1 952 906 8888
 +1 952 949 7001
 RMT-NA.RCCRFQ@Emerson.com




Latin America Regional Office

Emerson Automation Solutions

1300 Concord Terrace, Suite 400
Sunrise, FL 33323, USA
 +1 954 846 5030
 +1 954 846 5121
 RFQ.RMD-RCC@Emerson.com

Europe Regional Office

Emerson Automation Solutions Europe GmbH

Neuhofstrasse 19a P.O. Box 1046
CH 6340 Baar
Switzerland
 +41 (0) 41 768 6111
 +41 (0) 41 768 6300
 RFQ.RMD-RCC@Emerson.com

Asia Pacific Regional Office

Emerson Automation Solutions


1 Pandan Crescent
Singapore 128461
 +65 6777 8211
 +65 6777 0947
 Enquiries@AP.Emerson.com

Middle East and Africa Regional Office


Emerson Automation Solutions


Emerson FZE P.O. Box 17033
Jebel Ali Free Zone - South 2
Dubai, United Arab Emirates
 +971 4 8118100
 +971 4 8865465
 RFQ.RMTMEA@Emerson.com

 [Linkedin.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)

 [Twitter.com/Rosemount_News](https://twitter.com/Rosemount_News)

 [Facebook.com/Rosemount](https://www.facebook.com/Rosemount)

 [Youtube.com/user/RosemountMeasurement](https://www.youtube.com/user/RosemountMeasurement)

 [Google.com/+RosemountMeasurement](https://www.google.com/+RosemountMeasurement)

Emerson Terms and Conditions of Sale are available upon request.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
Rosemount is a mark of one of the Emerson family of companies. All other
marks are the property of their respective owners.
© 2018 Emerson. All rights reserved.